

VMD258 Series

Overvoltage and Undervoltage Relay
For Three-Phase AC Systems





VMD258

Features

- Undervoltage and overvoltage relay for three-phase AC systems up to 690 VAC
- Analog-only device, non-microprocessor controlled; perfect for utilities and other mission critical areas
- Overvoltage and undervoltage alarms operate simultaneously (window function)
- Adjustable undervoltage alarm, 70 - 95% of system voltage
- Adjustable overvoltage alarm, 105 - 130% of system voltage
- 0 - 5 s adjustable time delay
- Four separate alarm contact outputs, normally energized or de-energized dependant on output
- Line-powered, no separate supply voltage requireds

Description

The VMD258 series voltage relay monitors for undervoltage and overvoltage in three-phase AC systems. Both overvoltage and undervoltage are monitored for simultaneously. Alarm values are set as a percentage of the system voltage (see ordering information for more). Power for the monitoring is derived from the monitored system; an external supply voltage is not required. Many different system voltage ratings are available, up to 690 VAC.

The device contains analog-only components and is not microprocessor controlled. The supply of the electronics and relays are isolated by means of double isolation. Special input transformers attenuate system interferences.

The alarm values and time delays are steplessly adjustable. Four separate SPDT contact outputs are available for alarms:

- Undervoltage, normally energized relay (failsafe mode)
- Undervoltage, normally de-energized relay (non-failsafe mode)
- Overvoltage, normally energized relay (failsafe mode)
- Overvoltage, normally de-energized relay (non-failsafe mode)

Replaces the SUR353 / 357 / 358 series.

Applications

- Three-phase AC systems
- Utilities
- Three-phase motors, pumps, and other industrial equipment
- General three-phase distribution networks / loads

Optional energy backup

The ES258 energy backup device may be optionally connected to the VMD258. It provides power to the relay for min. 5 seconds if power is lost to the system.

Ordering information


System voltage (3Φ, L-L)	Ordering number
100 VAC	B 9301 0060
110 VAC	B 9301 0061
230 VAC	B 9301 0062
400 VAC	B 9301 0063
440 VAC	B 9301 0064
480 VAC	B 9301 0065
500 VAC	B 9301 0066
690 VAC	B 9301 0067

Accessories

Description	Ordering number
Additional mounting clips for screw mounting	B 9806 0008
External energy backup module (P/N ES258)	B 9301 0068




Operating elements

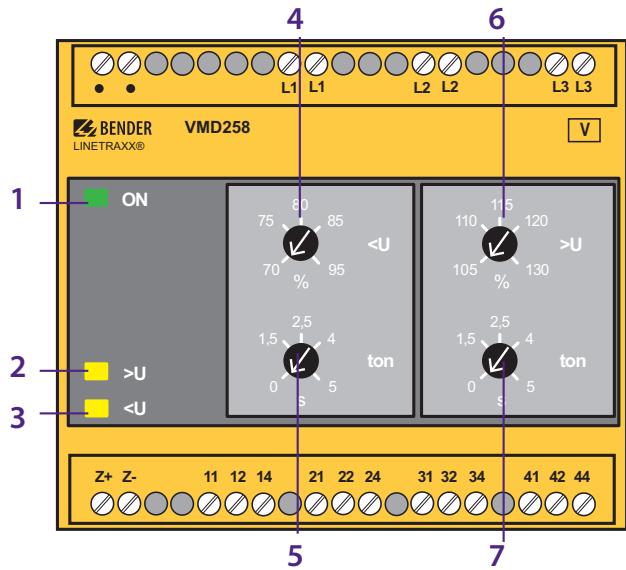

- 1 - Power On LED "ON" (green)
- 2 - Alarm LED ">U" (yellow): lights when the overvoltage alarm is activated.
- 3 - Alarm LED "<U" (yellow): lights when the undervoltage alarm is activated.
- 4 - Undervoltage alarm adjustment
- 5 - Time delay adjustment for undervoltage alarm
- 6 - Overvoltage alarm adjustment
- 7 - Time delay adjustment for overvoltage alarm


Wiring diagram

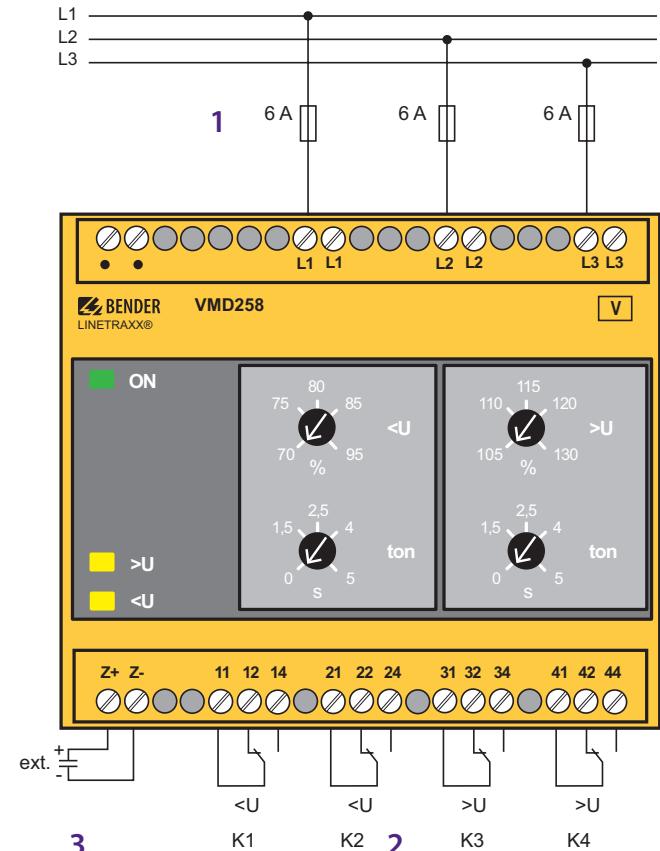

- 1 - Connection to system; fuses recommended
- 2 - Alarm contact outputs
- 3 - Connection for optional ES258 energy backup

Dimensions

Dimensions in inches (mm)

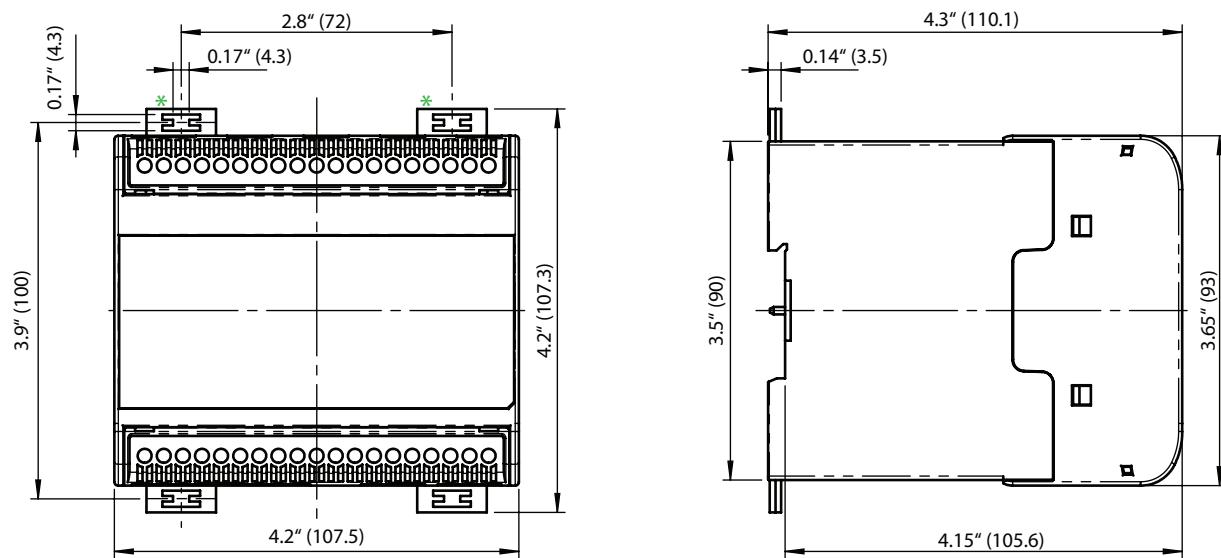

Technical data

Insulation coordination acc. to DIN EN 60255-27

Supply voltage U_s AC (V)	690	480/500	400/440	230	100/110
Rated voltage AC (V)	1000	1000	600	300	150
Rated impulse voltage (kV)	12	12	8	6	4
Pollution degree					3
Overtoltage category					III

Voltage ranges

Frequency range of U_s	45 - 66 Hz					
Operating range	0.5 - 1.5 x U_s					
Nominal supply voltage U_s 3AC (V)	690	500	480	440	400	230
Power consumption at 50 Hz, 1,3 x U_s (VA)	19	15	12	14	9	16
Power consumption at bei 60 Hz, 1,3 x U_s (VA)	11	9	8	8	6	9
						7

Measuring circuit

Nominal system voltage U_n	3AC 690/500/480/440/400/230/110/100 V					
Setting range	0.7 - 1.3 x U_n					
Frequency range f_n	45 - 66 Hz					
Max. permissible measuring voltage	1.5 x U_n					
Response value U_n adjustable	> U_n , < U_n					

Response values

Undervoltage < U (alarm)	0.7 - 0.95 x U_n
Overtoltage > U (alarm)	1.05 - 1.3 x U_n
Relative uncertainty at the setting limits	45 - 66 Hz: ±3 % 47,5 - 63 Hz: ±2 %
Hysteresis	< 3 %
Repetition accuracy	±1 %
LED ON	LED (green)
Alarm for < U	LED (yellow)
Alarm for > U	LED (yellow)

Time response

Start-up delay t	500 ms ±20 %
Response delay t_{on}	0 - 5 s ±10 %
Delay on release t_{off}	100 ms ±20 %
Operating time t_{ae} at overvoltage	60 ms* ±20 %
Operating time t_{ae} at undervoltage	100 ms** ±20 %
Response time t_{an}	$t_{an} = t_{ae} + t_{on}$
Long-term influence	-10 %
Overshoot time t_{ov}	< 60 ms

Connection for external energy storage device

U_{min}	DC 24 V
U_{max}	DC 68 V
U_{typ} at 1.0 x U_n	42 - 47 V ±15 %
Short-circuit proof (Z+, Z-)	short time yes

Switching elements

Number of switching elements	2 x 2 changeover contacts
Operating mode	N/C operation (undervoltage) N/O operation (overvoltage)
Electrical endurance, number of cycles	10000
Contact data acc. to IEC 60947-5-1	
Rated operational voltage AC	230 V/230 V
Utilisation category	AC-13/AC-14
Rated operational current AC	5 A/3 A
Rated operational voltage DC	220/110/24 V
Utilisation category	DC12
Rated operational current DC	1/0.2 / 0.1 A
Minimum current	1 mA at AC/DC > 10 V

Environment/EMC

EMC immunity	acc. to IEC 60255-26
EMC emission	acc. to IEC 60255-25
Operating temperature	-20 - +70 °C
Climatic class acc. to DIN IEC 60721-3-3	
Stationary use	3K5
Transport	2K3
Long-term storage	1K4
Classification of mechanical conditions acc. to IEC 60721	
Stationary use	3M4
Transport	2M2
Long-term storage	1M3
Requirements acc. to IEC 60255	Class 2

Connection

Connection	screw terminals
Connection properties	
rigid/flexible	0.2 - 2.5 mm ²
flexible with connector sleeve	0.25 - 2.5 mm ²
without/with plastic sleeve	0.25 - 2.5 mm ²
Conductor sizes (AWG)	24 - 13
Tightening torque	0.5 - 0.6 Nm
Current through L1L1, L2L2, L3L3	each max. 3 A

Other

Operating mode	continuous operation
Position	any position
Degree of protection, internal components (DIN EN 60529)	IP30
Degree of protection, terminals (DIN EN 60529)	IP20
Enclosure material	polycarbonate
Flammability class	UL94 V-0
DIN rail mounting acc. to	IEC 60715
Screw mounting	4 x M4
Weight	825 g

* Operating time t_{ae} **overvoltage**

Increase from 100 % to 130 %, switching threshold at 105 %

** Operating time t_{ae} **undervoltage**

Decrease from 100 % to 0 %, switching threshold at 95 %



USA • Exton, PA • 800-356-4266 / 610-383-9200
Mexico and Central America • Tampa, FL • +1 813-240-2858
info@bender.org • www.bender.org

Canada • Mississauga, ON • 800-243-2438 / 905-602-9990
info@bender-ca.com • www.bender-ca.com

South America • Santiago de Chile • +56 2 2933 4211
info@bender-latinamerica.com • www.bender-latinamerica.com



Your local contact: