


# **eWON COSY**

Remote maintenance via LTE VPN remote maintenance router in combination with Bender devices of the COMTRAXX® series



## **eWON COSY**





#### **Device features**

- LTE router
  - Europe
  - APAC
  - North America
- · VPN tunnel
- · DIN rail mounting
- 4 RJ45 ports, 3 configurable as WAN
- 10/100 Mb Ethernet
- · SIM card slot
- · SD card slot
- 1 digital Out
- 2 digital In

#### **Approvals and certifications**



RED, FCC

## Product description and application options

The year 2020 has shown how restricted freedom of movement can be and how one is still dependent on support.

With an LTE router, technicians can get an overview of the connected systems at any time.

The connection can be made via the customer network or LTE.

Via connected COMTRAXX® devices (COM465IP, CP9xx, CP9...-I), bus devices can be displayed, controlled and parameterised remotely.

#### **Function**

- · Suitable for all applications
  - Hospitals and industrial applications
  - Integration into the Bender network
- also retrospectively
- · Permanent or time-limited access
- Wake up via SMS
- Disconnection of the power supply
- · Can also be used as an NTP server

## Configuration

Two programmes from eWon are required for commissioning, configuration and operation. eCatcher and eBuddy can be downloaded from the download area of the Wachendorff company. (https://www.wachendorff-prozesstechnik.de/produktgruppen/fernwartung-und-fernwirken/informationen/downloads/)

Detailed commissioning is described in the operating instructions from the Wachendorff company. (https://www.ewon.biz/products/cosy/ewon-cosy?ordercode=EC71330\_00MA)

## **Ordering information**

	Туре	Art. No.
Router COSY+	4G/LAN Europe	B95012058
Router COSY+	4G/LAN North America	B95012059
Router COSY+	4G/LAN APAC	B95012060
Antenna with 5 m connection cable		B95012062

#### **Accessories**


Туре	Art. No.
Power supply unit DC 24 V 4.2 A	B94053112

## **Technical data**


Power supply	DC 1224 V ±20 %
Capacity	4 watts
Dimensions	108 x 99 x 43 mm
Weight	202 g
Operating temperature	-25+70 ℃
Humidity	1095 % non-condensing
Mounting	DIN rail/wall mounting



# Installation example

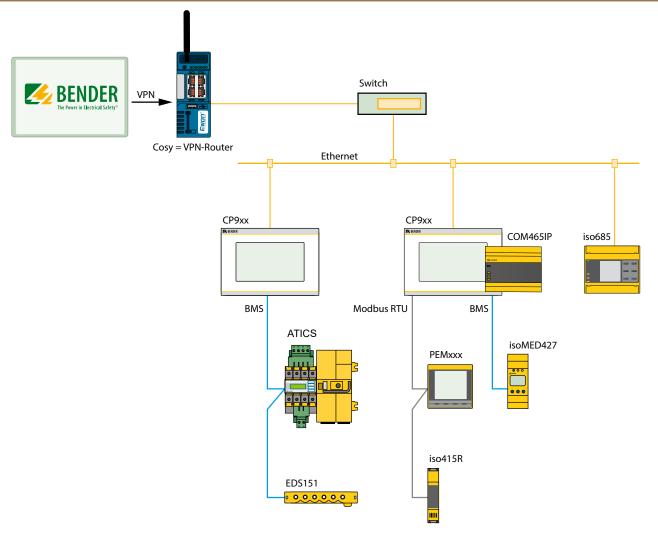

# **Dimension diagram**

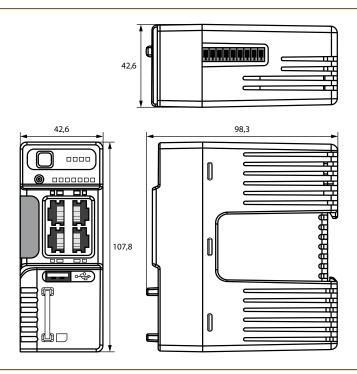



## Bender GmbH & Co. KG

Londorfer Straße 65 • 35305 Grünberg • Germany Tel.: +49 6401 807-0 • info@bender.de • www.bender.de

